


Hack10 Swivel Self Locking Hook

All William Hackett Hack10 lifting components comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

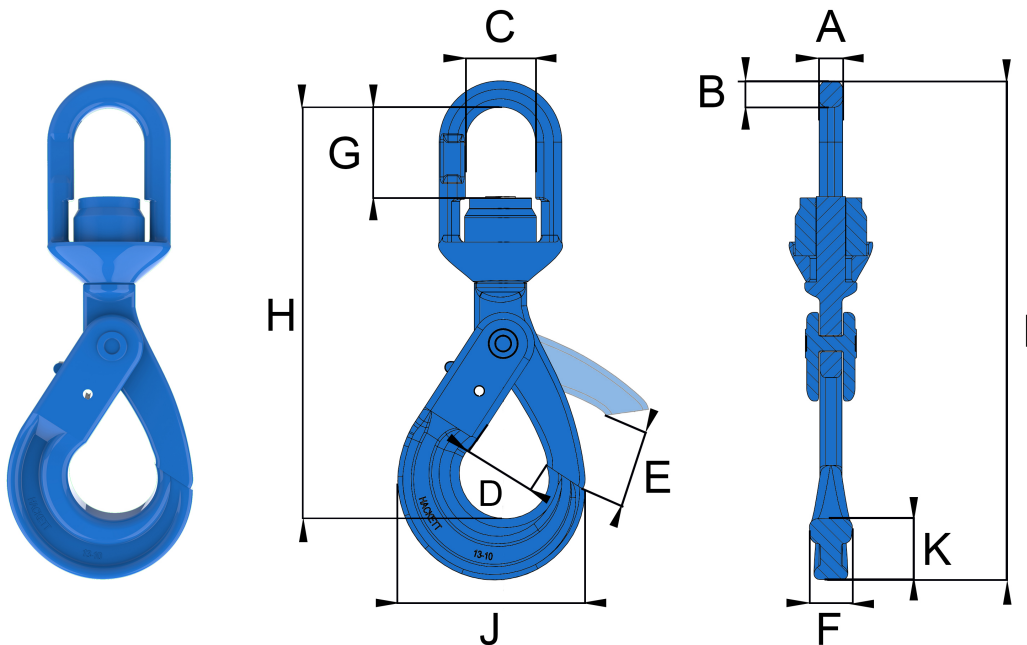

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	WLL tonnes	Box Quantity	Mass kg
10-H14-08	8	13.0	15.0	41	35.0	38.0	21.5	40.0	203	244	90	26.0	2.50	12	1.21
10-H14-10	10	15.5	17.5	48	45.0	48.0	22.5	51.0	244	289	108	27.0	4.00	7	2.20
10-H14-13	13	17.0	19.0	55	53.6	63.0	32.0	59.0	295	354	138	40.0	6.70	4	4.40
10-H14-16	16	21.5	26.0	62	62.0	75.0	38.0	66.0	348	424	170	50.0	10.00	3	7.48
10-H14-20	20	26.5	28.5	76	76.0	85.0	50.0	76.0	339	489	191	62.0	16.00	2	13.75
10-H14-22	22	33.0	33.0	97	79.0	100.0	52.0	100.0	469	566	205	65.0	19.00	1	18.81
10-H14-26	26	42.0	42.0	123	100.0	107.0	60.0	119.0	565	688	251	81.0	26.50	1	31.40
10-H14-32	32	52.0	52.0	152	135.0	152.0	75.0	153.0	680	830	329	101.0	40.00	1	65.00

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	J inch	K inch	WLL lbs	Box Quantity	Mass lbs
10-H14-08	5/16	0.51	0.59	1.61	1.38	1.49	0.85	1.57	7.99	9.60	3.54	1.02	5700	12	2.66
10-H14-10	3/8	0.61	0.69	1.89	1.77	1.89	1.00	2.00	9.60	11.38	4.25	1.06	8800	7	4.85
10-H14-13	1/2	0.67	0.75	2.16	2.11	2.48	1.26	2.32	11.61	13.94	5.43	1.57	15000	4	9.70
10-H14-16	5/8	0.85	1.02	2.44	2.44	2.95	1.49	2.60	13.70	16.99	6.69	1.97	22600	3	16.49
10-H14-20	3/4	1.04	1.12	2.99	2.99	3.35	1.97	2.99	15.71	19.25	7.52	2.44	35300	2	30.31
10-H14-22	7/8	1.30	1.30	3.82	3.11	3.94	2.05	3.94	18.46	22.28	8.07	2.56	42700	1	41.47
10-H14-26	1	1.65	1.65	4.84	3.94	4.21	2.36	4.69	22.24	27.08	9.88	3.18	59800	1	69.23
10-H14-32	1-1/4	2.05	2.05	5.98	5.31	5.98	2.95	6.02	26.77	32.68	12.95	3.97	90400	1	143.30