

XTIRPA™ DAVIT ARMS



IN-2210



Reach up to 610 mm
Weight 16 kg
MWL 164 kg

Versatile, fast and innovative. Use with mast IN-2003.

IN-2237



Reach 762 to 1219 mm
Weight 23 kg
MWL 164 kg

Mid-reach davit. Also available in an anodised finish (IN-2237P).

IN-2197



Reach 1524 to 2438 mm
Weight 62 kg
MWL 164 kg

Longest reaching option.





IN-2363

Reach 229 mm
Height 920 mm
Weight 7 kg




IN-2395

Reach 381 mm
Height 920 mm
Weight 10 kg



IN-2395P
 Anodised

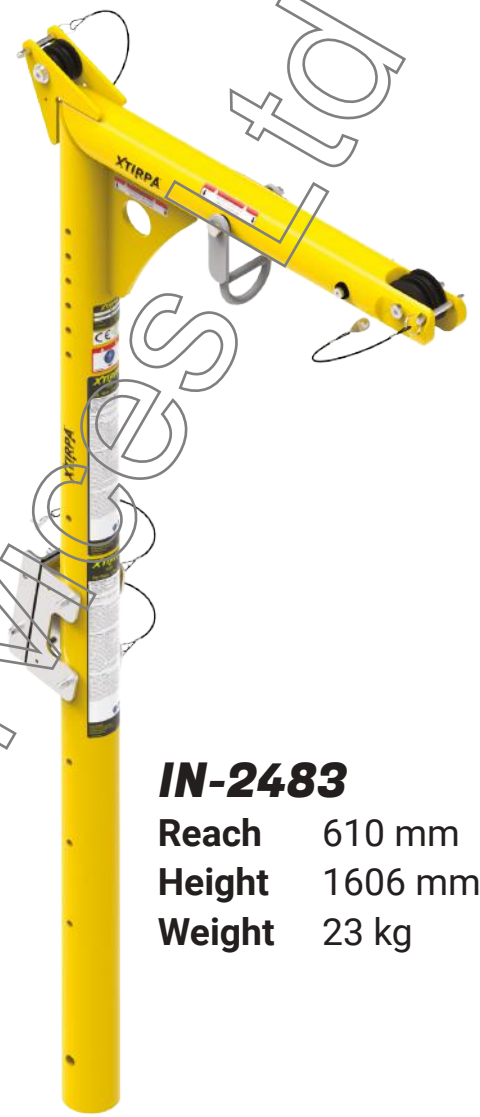

IN-2483

Reach 610 mm
Height 1606 mm
Weight 23 kg

IN-2197

IN-2237

IN-2210
 + IN-2003

IN-2483

Offset Bracket
 A2395-07
 (for fitment of
 Globestock
 WINCH)



XTIRPA™ MASTS

IN-2003



Davit Arm	Height Option		
IN-2210	1145 mm (IN-2003)		
IN-2363	381 mm IN-2044	457 mm	610 mm
IN-2395		IN-2109	IN-2045
IN-2483			
IN-2237	508 mm IN-2426	1067 mm IN-2240 / IN-2240P anodised	1524 mm IN-2313
IN-2197	610 mm IN-2470	1067 mm IN-2199	1372 mm IN-2414

XTIRPA™ SOCKETS



XTIRPA sockets are available in zinc-coated, 304 stainless or 316 stainless steel. See the table opposite for the types and materials available.

FIXED SOCKETS

Davit System	610 mm Arms IN-8016			1200 mm Arms IN-8005			2450 mm Arms IN-8006	
	Material / Type *	Zinc coated	304 Stainless	316 Stainless	Zinc coated	304 Stainless	316 Stainless	304 Stainless
	IN-2137	IN-2105	IN-2329	IN-2304	IN-2254	IN-2451	IN-2201	
	IN-2106	IN-2005	IN-2311	IN-2302	IN-2238	IN-2452		
	IN-2107	IN-2013	IN-2327	IN-2303	IN-2253	IN-2468	IN-2420	
 8" offset		IN-2124						
 14" offset		IN-2067	IN-2312					
	IN-2114	IN-2006	IN-2325		IN-2266			
		IN-2007	IN-2326		IN-2382			
		IN-2097	IN-2328		IN-2255			
							IN-2546	IN-2544
		IN-2117			IN-2516		 Socket Caps (available separately) prevent dirt and water entering sockets when they are not in use.	
	IN-2132	IN-2131						
	IN-2134	IN-2133						


*images for illustrative purpose only. Design may vary between each item code.

XTIRPA™ GUARDRAIL



IN-8002 / 8011
DAVIT SYSTEM

WITH INTEGRATED MAST AND BARRICADE

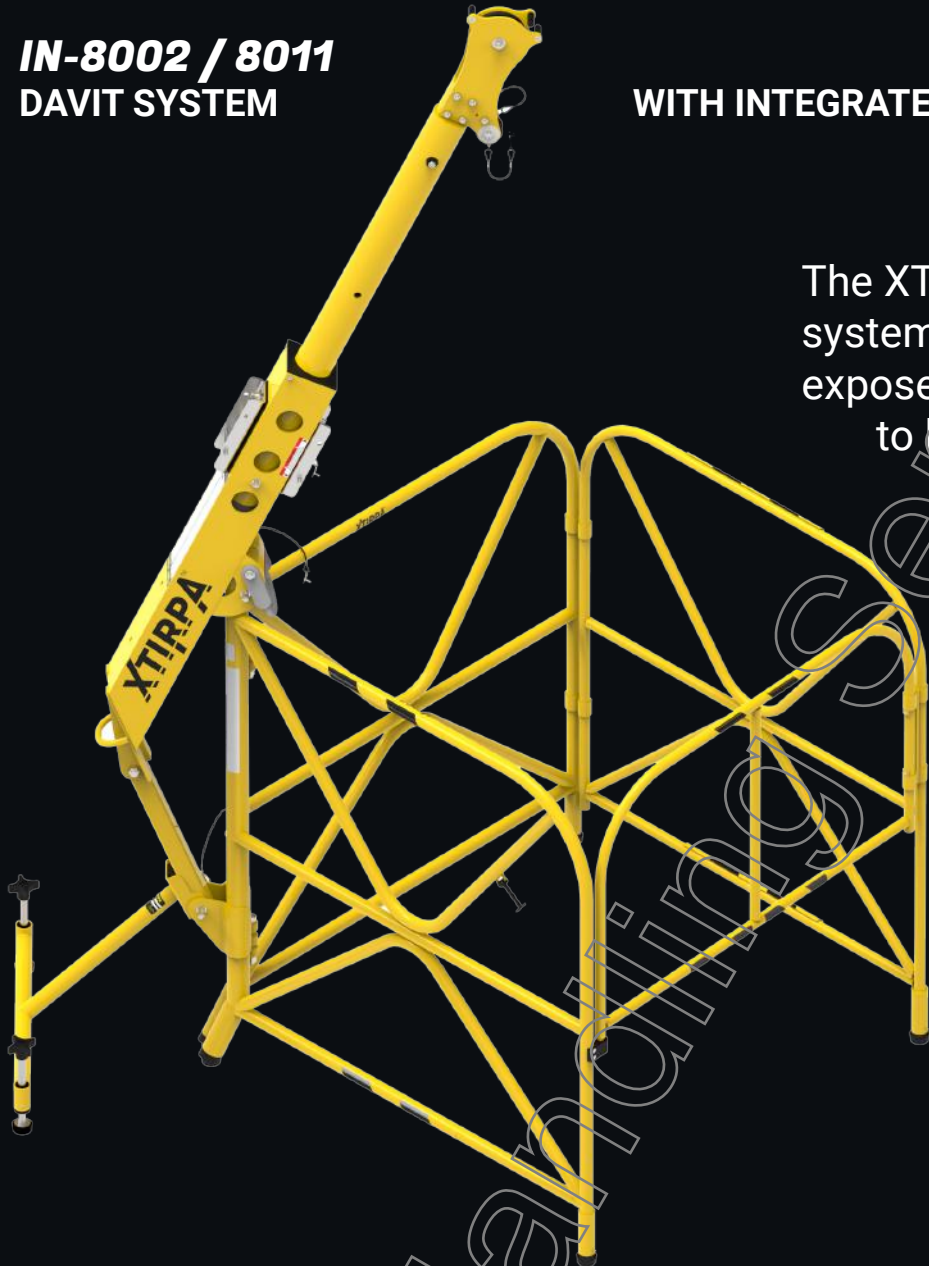

The XTIRPA Guardrail davit system is used when an exposed entry point needs to be guarded. This portable system has an integrated mast that is used in conjunction with a davit arm to provide fall protection, entry and retrieval.

Use with davit
IN-2210.




XTIRPA™

- Protect exposed edges
- Gate opens for simple access
- Barricade extensions available
- Fast and easy to assemble
- Folds flat for storage
- Lightweight aluminium
- Adjustable davit arm length
- Square or V configuration



Deployed in the V configuration (A2108-20 Stabiliser required)

GUARDRAIL ACCESSORIES

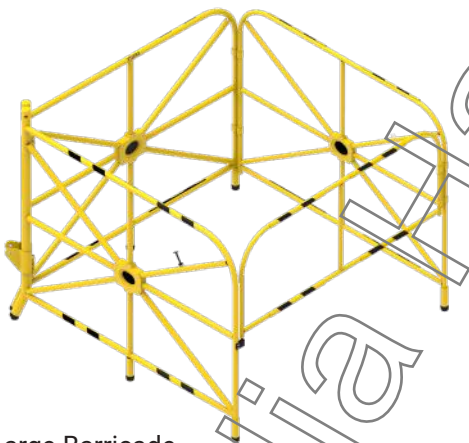

Large Barricade
IN-2324



Barricade Extension
IN-2101
May be deployed in various configurations. One than one can be linked together.



Wheeled Stabiliser
A2108-20
Enables the barricade to be used in the open V configuration. Wheels allow the system to be moved short distances more easily.

XTIRPA™ COUNTERWEIGHT


IN-8007 / 8012

DAVIT SYSTEM WITH COUNTERWEIGHT BASE


A counterweight system is ideal when you need to move and access various confined spaces entry points in the same area. Consisting of a central T-base unit with a number of options for anchoring, positioning, leg adjustment and extension, this is a system designed for versatility.

Use with XTIRPA davit arms except IN-2197.

610 mm and 1200 mm reach options.

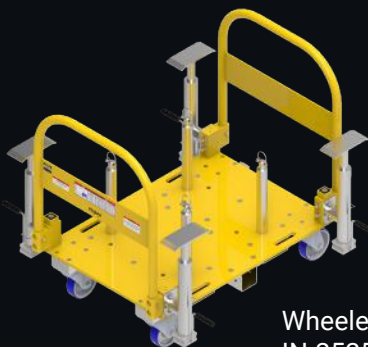

Wheeled Cart
IN-2525

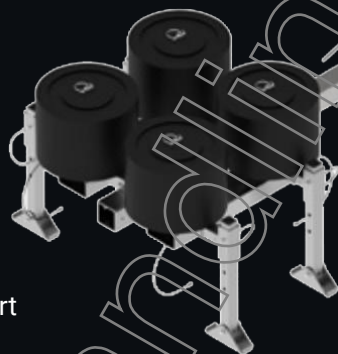


Weights
P2525-017eu (each)

Static Cart
A2305-90


Wheeled Cart: heavy duty casters make positioning simple.

Static Cart: fork slots for moving with forklifts.



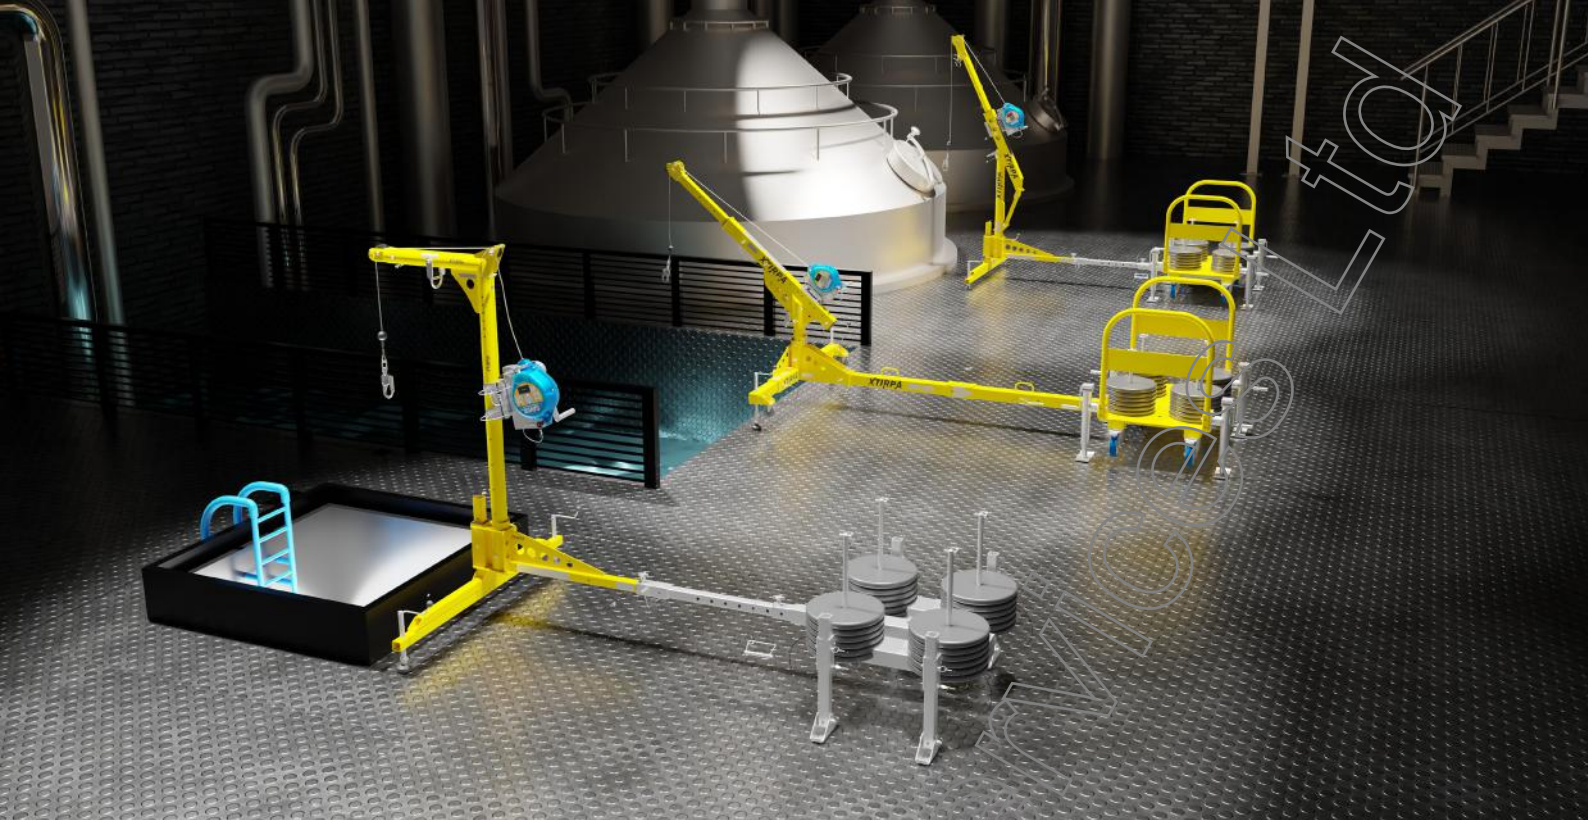

T-BASES & EXTENSIONS

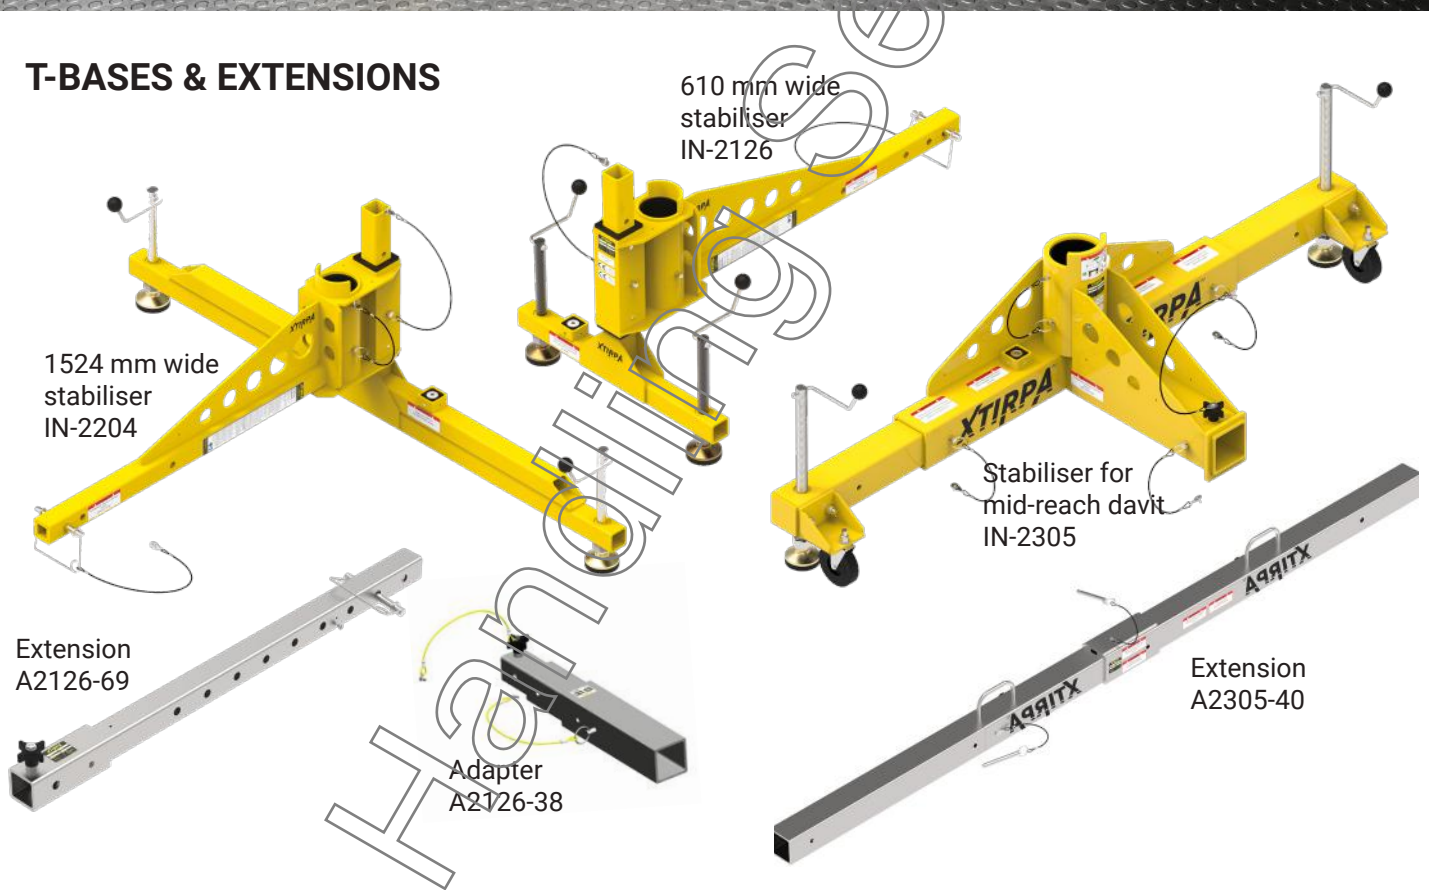

System Compatibility Table

Davit	T-Base	Extension	Cart	Weights
IN-2210	IN-2204 or IN-2126	A2126-69 + A2126-38	IN-2525 or A2305-90	P2525-017eu
IN-2363				
IN-2395				
IN-2483	IN-2305	A2305-40		
IN-2237				

XTIRPÁ™ TRENCH BASES



XTIRPÁ™	IN-2021	IN-2129	IN-2315	IN-2560	IN-2482
Features	Weight: 17 kg 304 stainless steel	Weight: 21 kg Zinc-plated steel	Weight: 22 kg Zinc-plated steel!	Weight: 32 kg 304 stainless steel Fitted spanners	Weight: 23 kg Aluminium Fitted spanners Ladder retainer
Wall Size	0 to 76 mm	0 to 76 mm	51 to 127 mm	0 to 26 mm	51 to 267 mm
MWL	164 kg				
Application	Thin sheet	Thin sheet	Trench / shoring	Pile sheet	Trench / shoring



IN-8005 / 8018

WALL CLAMPS FOR TRENCHING / SHORING

107

IN-2380	IN-2008	IN-2168	IN-2251	IN-2075	IN-2125
					
Weight: 49 kg Zinc plated steel Fitted spanners Use with IN-2237	Weight: 30 kg Aluminium Fitted spanners	Weight: 31 kg Aluminium Caster wheels Fitted spanners	Weight: 32 kg Aluminium	Weight: 50 kg Aluminium Caster wheels Stability levers Fitted spanners	Weight: 52 kg Aluminium Caster wheels Stability levers Fitted spanners
254 to 432 mm	152 to 400 mm	305 to 610 mm	305 to 762 mm	305 to 797 mm	610 to 1147 mm
			164 kg		
Wall adapter	Shoring / wall adapter	Wall adapter	Shoring / wall adapter	Wall adapter	Wall adapter



XTIRPA HITCH MOUNT

IN-8007 / 8012

PORTABLE ACCESS SYSTEM

The hitch mount davit system provides a portable confined space access system with a hitch attachment for vehicles and other anchor points. Available for either short reach (610 mm) or mid-reach davit arms (1200 mm).




T-BASE STABILISER

610 mm-wide stabiliser
IN-2126

1524 mm-wide stabiliser
IN-2204

Stabiliser for mid-reach davit
IN-2305

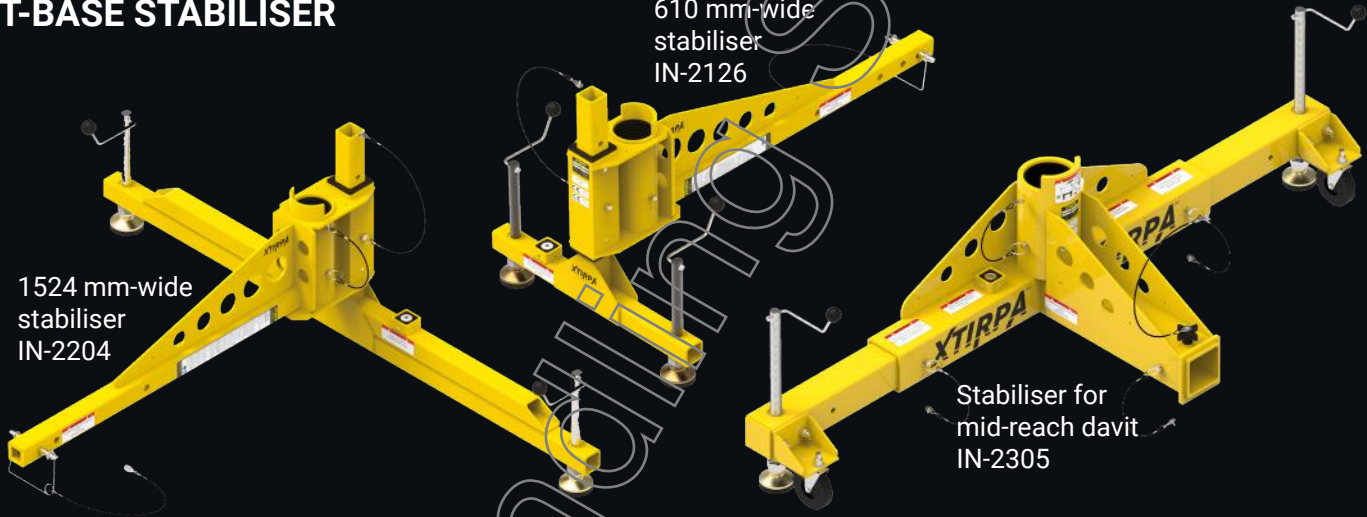


SAVER

WINCH

610 mm davit arm (IN-2210) with T-base (IN-2305), 90° extension (A2126-10) and vehicle hitch adapter (IN-2517)

2162mm

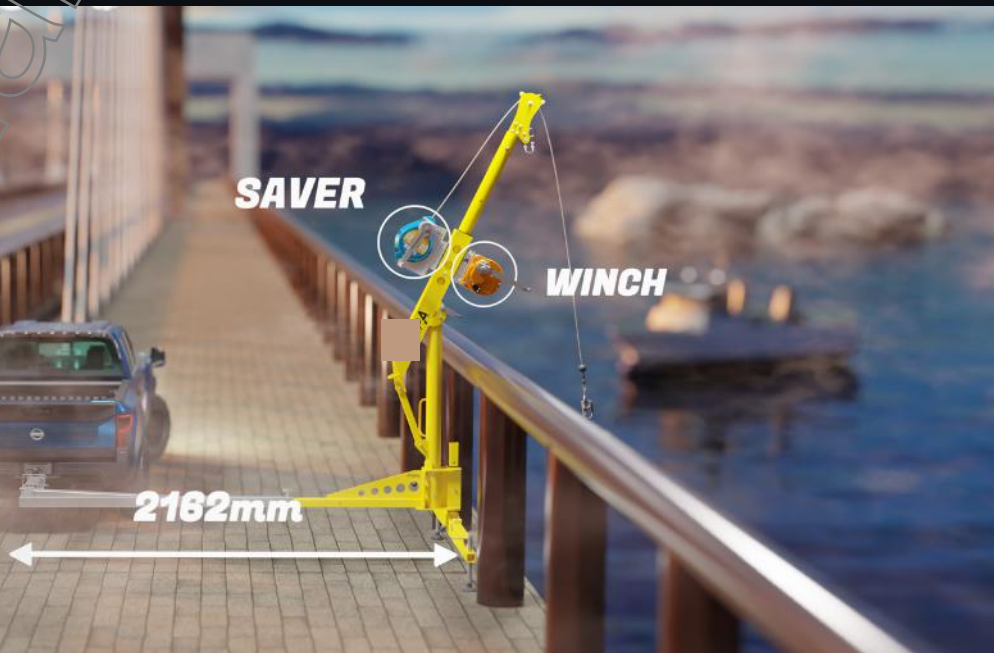

XTIRPA HITCH ANCHORS




Anchor Bolt Adapter
A2126-21



Short C-Clamp
A2126-14



Long C-Clamp
A2126-33

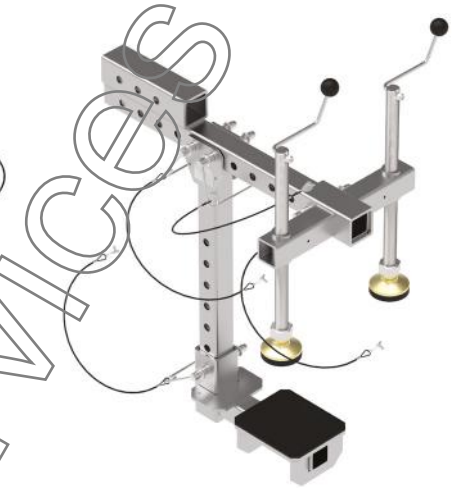

Mezzanine C-Clamp
A2126-50




Wall Adapter
IN-2348



Vehicle Adapter
IN-2517

EXTENSION COMPONENTS

Code	Description
A2126-07	Universal Joint Assembly
A2126-09	Extension - 1829 mm
A2126-10	90° Extension - 1321 mm
A2126-56	Reducer - 63.5 to 51 mm
A2126-66	Extension - 1400 mm
A2126-69	Extension - 900 mm
A2305-25	T-base Reducer
A2305-55	Adapter

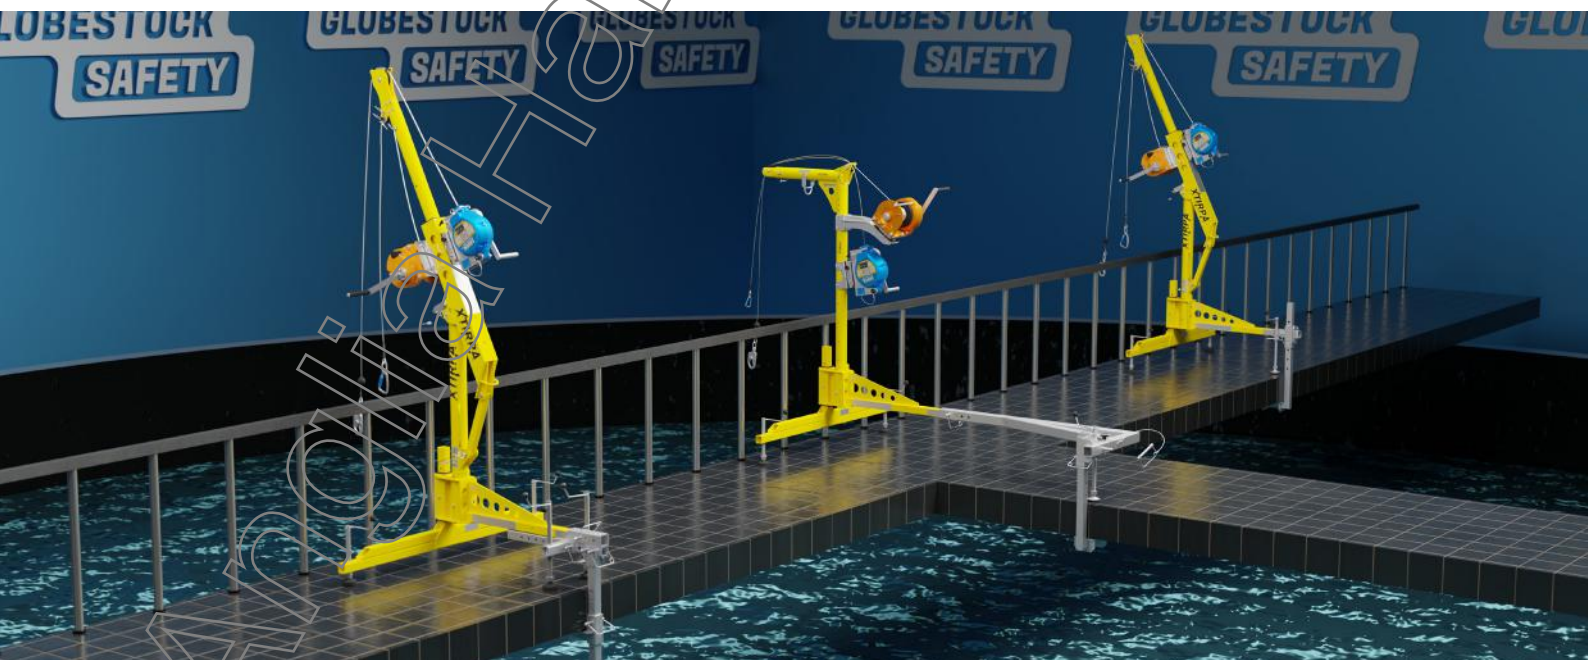

XTIRPA™ H-BASE



IN-8004 EASY MOVE ACCESS SYSTEM

The H-Base is ideal when there's a need to move the equipment between different access points. Heavy duty wheels allow the system to be repositioned easily. Adjustable to cover widths from 914 mm to 1524 mm.

Use with davit arms
IN-2210 or IN-2483.



H-Base
IN-2118
(inc. legs)

Extendable legs, integrated spirit level and easy height adjustment make setup quick and simple.



Davit Arm
IN-2483

Davit Arm
IN-2210 + IN-2003

H-Base
IN-2118

XTIRPATM MANHOLE COLLAR

IN-8014 SECURE ANCHORAGE FOR OPENINGS


Suitable for a wide range of opening sizes. Allows the angle of the mast to be adjusted, enabling fitment on gradients.

A range of accessories available.

Manhole Collar
IN-2498P



Most are adjustable from 0 to 30° at 5° increments.

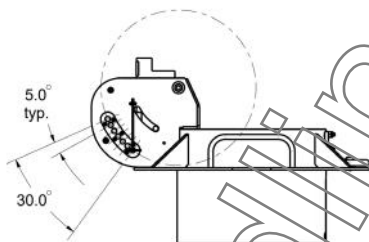

Code	Opening Size	Features
IN-2287	406 - 457mm	Circular, powdercoated, 0-30°
IN-2219	457 - 508 mm	
IN-2220	508 - 559 mm	
IN-2221	559 - 610 mm	
IN-2217	610 - 660 mm	
IN-2222	660 - 711 mm	
IN-2218	711 - 762 mm	
IN-2167	762 - 813 mm	
IN-2223	813 - 864 mm	
IN-2224	864 - 914 mm	
IN-2469	381 - 584 mm	
IN-2534	400 - 600 mm	Splittable, powdercoated, 0-45°
IN-2475	610 mm	Powdercoated, 0-45°
IN-2486P	406 - 457 mm	Circular, anodised, 0-30°
IN-2496P	457 - 508 mm	
IN-2497P	508 - 559 mm	
IN-2490P	559 - 610 mm	
IN-2498P	610 - 660 mm	
IN-2499P	660 - 711 mm	
IN-2500P	711 - 762 mm	
IN-2487P	762 - 813 mm	



Anodised Davit Arm
IN-2395P

Anodised Manhole Collar
IN-2497P

IN-8008

VERTICAL OR HORIZONTAL ENTRY & RETRIEVAL

Pole hoist system with swivel-head for vertical or horizontal retrieval and fall arrest. Adjustable length. Use with a certified anchor point.

- Two arm sizes are available:
- 1218 - 1829 mm (IN-2337)
 - 1448 - 2591 mm (IN-2338)



Jib Adapter
IN-2241



Flange Adapter
IN-2242




Ring Adapter
IN-2087



T Bar
(see table)

T Bars	
Code	Height
IN-2274	332 - 378 mm
IN-2127	913 - 1218 mm
IN-2256	1189 - 1900 mm

Each hoist arm fits on top of an adjustable T-Bar for stability.

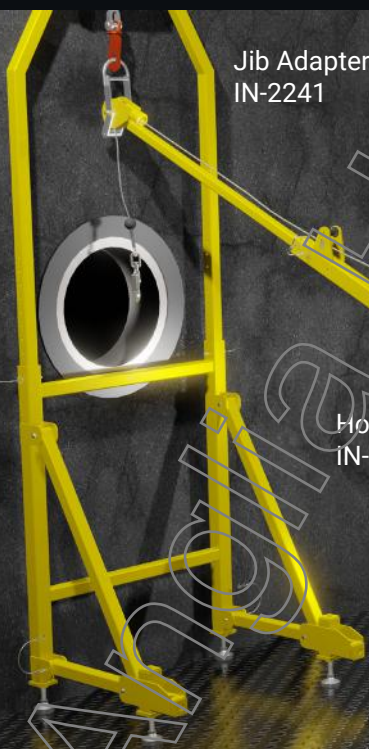


Jib Adapter
IN-2241

Flange Adapter
IN-2242

Hoist Arm
IN-2337 / IN-2338

T Bar

XTIRPA™ X-TRAK-R

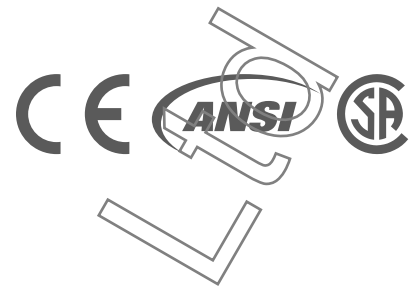

IN-8025 ADVANCED POLE HOIST WITH MULTI-ANGLE HEAD

Multi-angle hoist system equipped with fast lock pins for multiple configurations. Lightweight and extendable.

- **Just 9.7 kg**
- **Adjustable T Bar**
- **Folds flat for storage**
- **Light to carry, fast to deploy**
- **Multi-angle head for adaptability**
- **Premium grade anodised aluminium**



Pole Hoist System
IN-2557



XTIRPA™ UNIVERSAL ANCHOR POST

IN-8021 MODULAR FALL ARREST POST SYSTEM

The XTIRPA Universal Anchor Post system is designed to handle a variety of fall protection applications. It can be installed on flat indoor or outdoor surfaces, rocky or dirt ground and can even be mobilised with a vehicle hitch mount system.

Designed as a three person, horizontal lifeline or fall protection and retrieval device, it's truly universal.




SRL / Winch Support
A5032-07



Post A5032-01

Below-ground Anchor Tube	Tube Diameter
A5032-35	3.5" / 89 mm
A5032-40	4" / 102 mm
A5032-45	4.5" / 114 mm
A5032-50	5" / 127 mm
A5032-55	5.5" / 140 mm
A5032-60	6" / 152 mm
A5032-65	6.5" / 165 mm
A5032-80	8" / 203 mm



Post with
below-ground
anchor tube

A lifeline may be tensioned between two posts to create a horizontal lifeline system.



Floor adapter
socket IN-2570



Vehicle Hitch Mount
A5032-15



AUTOREEL

Floor adapter
socket IN-2570

IN-8020 / 8022

TELESCOPIC ANCHORAGE FOR WORKING AT HEIGHT

The SRL-R fits to the mast at ground level, providing an inbuilt rescue plan.




XLT with 2743 mm reach
IN-5054

SAVER SRL-R, mounted at ground level for inbuilt rescue plan.
GSE414G

Concrete blocks with retention grid.
A5039-46 + A5039-58 + A5039-12


XLT with 1829 mm reach
IN-5039

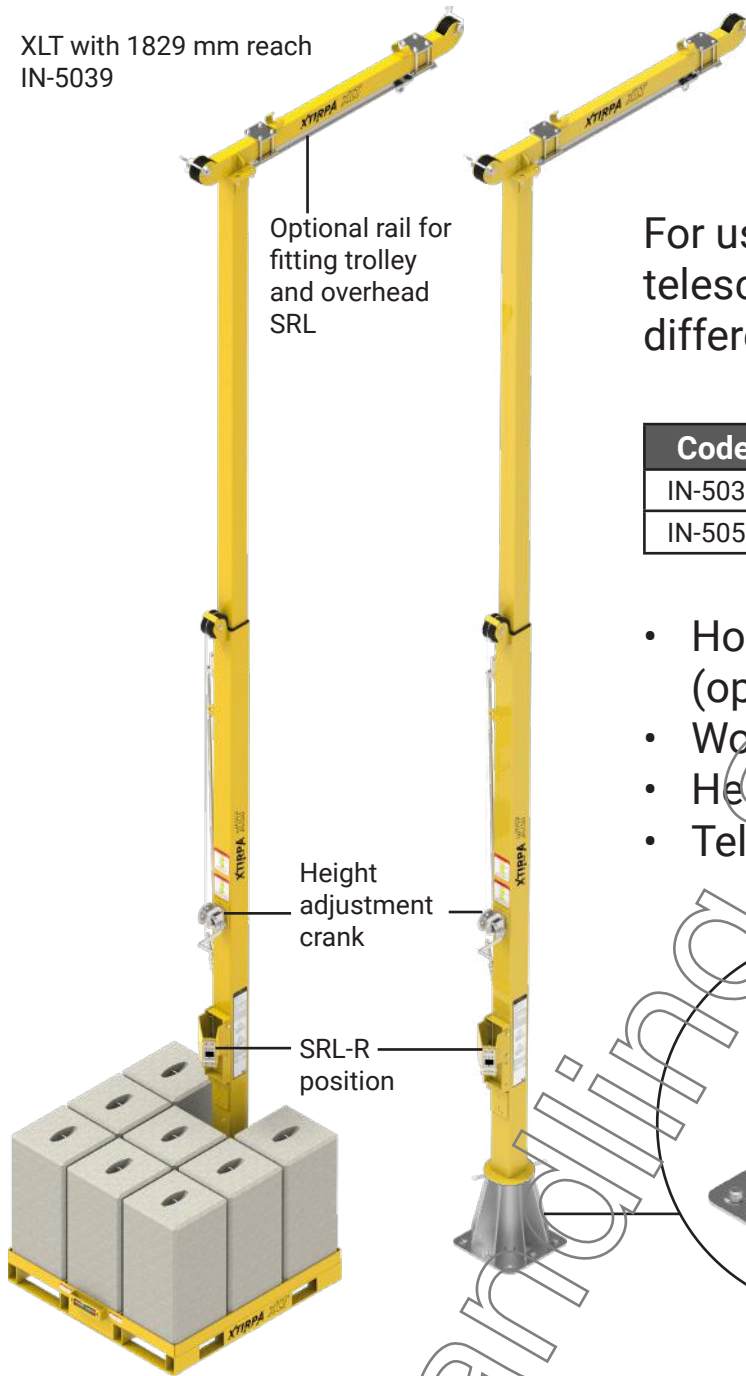

For use on elevated platforms. Two telescopic XLTs are available with different reaches:


Code	Reach	Height
IN-5039	1829 mm	Adjustable from 4762 to 7727 mm
IN-5054	2743 mm	(if fitted to Floor Adapter IN-5040)

- Horizontal rail and trolley for SRL (optional extras)
- Working position lock mechanism
- Height adjustment crank
- Telescopic mast

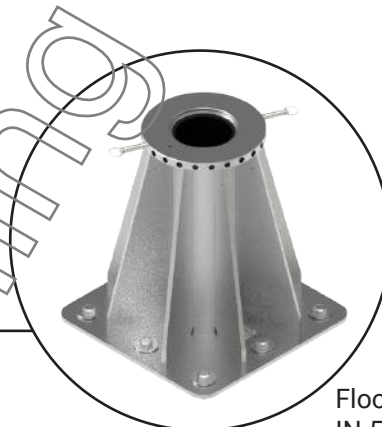

Floor Adapter
IN-5040

Code	Accessory
A5039-12	Base for adjustable davit arm
A5039-40	Rail for XLT IN-5039
A5039-45	Set of bolts for XLT base
A5039-46	Retention grid for concrete blocks
A5039-57	Kit of 8 moulds & installation hardware (no concrete)
A5039-58	Kit of 8 mould with concrete poured
A5042-15	Ladder stabiliser
A5054-04	Rail for XLT IN-5054
IN-5040	Floor adapter, stainless steel

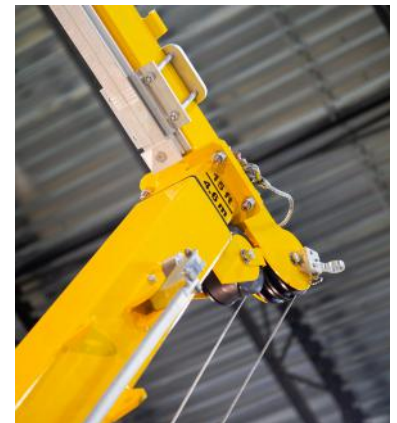

XTIRPA™ FIXED-MAST XLT

IN-8023

FIXED HEIGHT ANCHORAGE FOR WORKING AT HEIGHT

Offering 2749 mm reach, the Fixed Mast XLT can cover a range of height options from 2848 mm to 7477 mm. The SRL-R fits to the mast at ground level, providing an inbuilt, straight-forward rescue plan.

www.globestockhandling.com.au

SAVER SRL-R, mounted at ground level for inbuilt rescue plan.
GSE414G

Concrete blocks with retention grid.
A5039-46 + A5039-58 + A5039-12



Fixed Mast XLT
IN-5056

Optional rail for
fitting trolley
and overhead
SRL

Extension Combination	Height *
IN-5056 only	2848 mm
IN-5056 + A5055-09	4061 mm
IN-5056 + A5055-10	5159 mm
IN-5056 + A5055-09 x2	5258 mm
IN-5056 + A5055-09 + A5055-10	6379 mm
IN-5056 + A5055-09 x3	6499 mm
IN-5056 + A5055-10 x2	7477 mm


* when fitted to floor adapter IN-5040

Code	Accessory
A5054-04	Rail for XLT IN-5056
A5039-27	Additional SRL / Winch Mounting Bracket
A5055-09	1219 mm long Mast Extension
A5055-10	2318 mm long Mast Extension
A5039-57	Kit of 8 moulds & installation hardware (no concrete)
A5039-58	Kit of 8 mould with concrete poured
A5039-46	Retention grid for concrete blocks
A5039-12	Grid Base
IN-5040	Floor Adapter, stainless steel

2318 mm Mast Extension
A5055-10

SAVER SRL-R

- Horizontal rail and trolley for SRL (optional extras)
- Extensions may be combined
- 2749 mm reach
- Up to 7477 mm height *

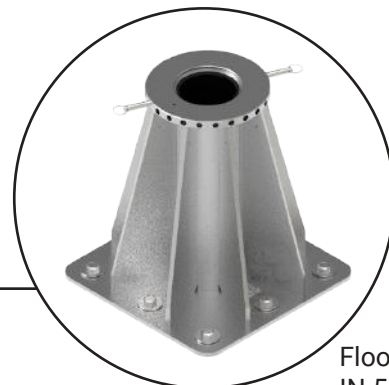

Floor Adapter
IN-5040


IN-2477

LIGHT, COMPACT MAN/MATERIAL WINCH

15 m (49 ') of galvanised or stainless steel cable. The handle can be located on either side of the unit.

Constructed using advanced materials and precision engineering, this winch offers an unparalleled combination of power and portability. The lightweight design ensures ease of handling and transport. Swift cable replacement reduces downtime.

- Lightweight and compact
- 59 - 140 kg (130 - 310 lb) WLL
- Swappable handle (left or right)
- Magnetic winch arm holder
- Premium-grade aluminium

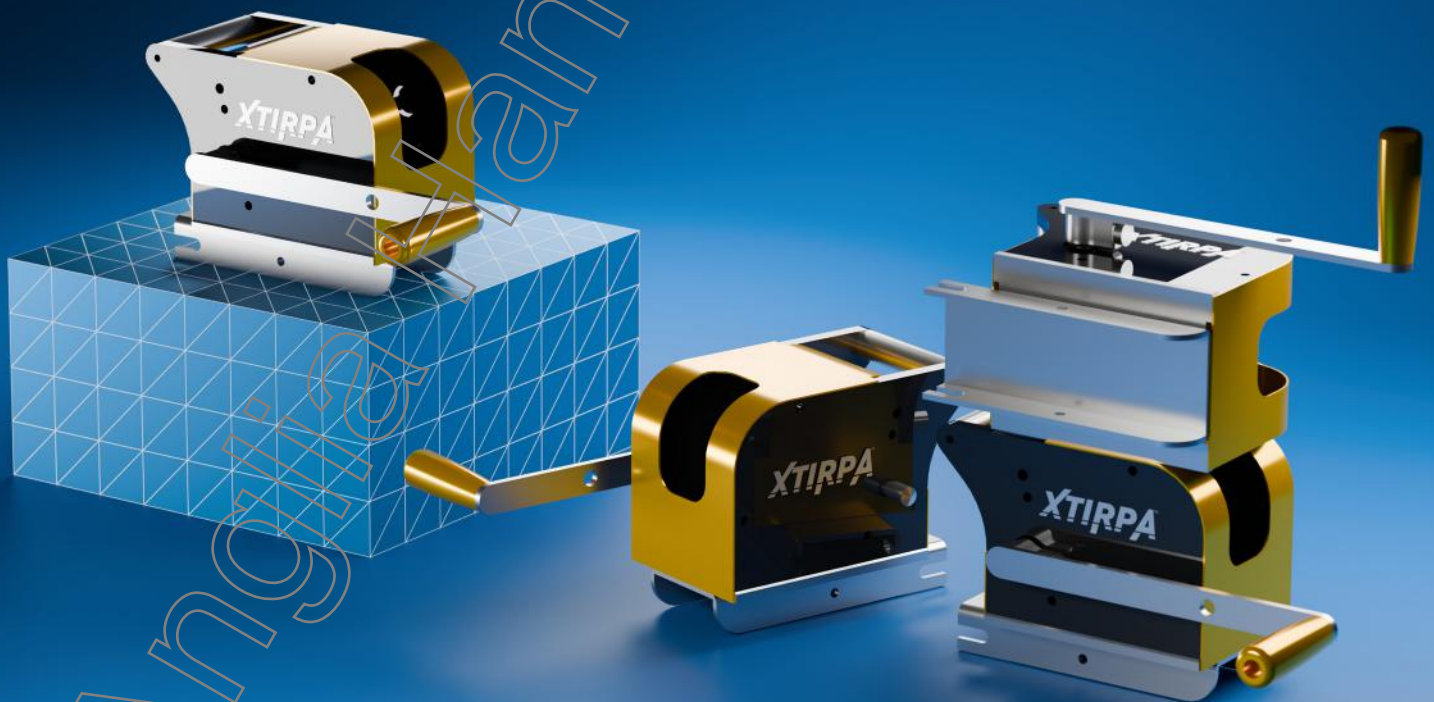

XTIRPA™ BRACKETS

Code	Compatibility
GSE200WBX	Globestock WINCH
GSEABX14	SAVER or STOP 10 - 14 m (33 - 46 ft)
GSEABX20	SAVER or STOP 20 m (66 ft)
GSEABX34	SAVER or STOP 30 - 34 m (99 - 112 ft)



GSEABX14








GSE200WBX

XTIRPA™ SWIVEL WALL PLATE

IN-2314

Use to install a fall arrester and / or winch below a pulley system for confined space access. Use with concrete walls. Made from stainless steel.

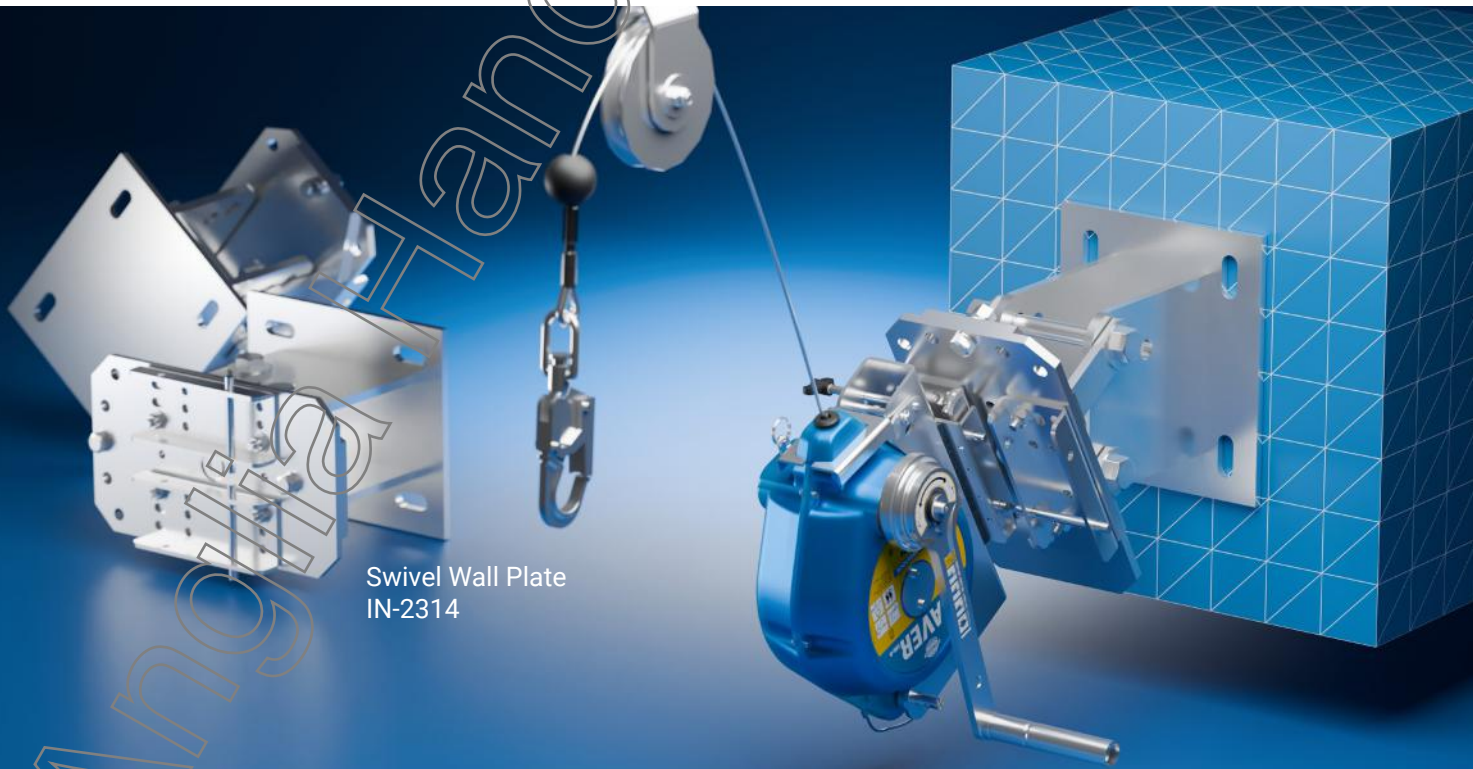

Swivel Wall Plate
IN-2314