


## Mobile Gantries

### Mobile Lightweight Gantry



- Capacities up to 500 kg
- Ideal for handling small loads
- Supplied with a top running hand pushed trolley
- Lightweight design
- Supplied with 100 mm diameter nylon castors
- Height under beam 2438 mm
- Width between frames 2438 mm


### Mobile Packaway Gantry



- Capacities up to 2000 kg
- Designed for easy dismantling and transportation
- Lightweight design
- Supplied with cast iron castors
- Standard height under beam 3048 mm
- Standard width between 'A' frames 3353 mm

- **Also manufactured to your specification**


### Mobile Fixed Height Gantry



- Capacities up to 5000 kg
- Bracing can be internal (as shown) or external
- Supplied with cast iron castors
- Options include polyurethane tyred castors and parking jacks
- Standard height under beam 3048 mm
- Standard width between 'A' frames 3353 mm

- **Also manufactured to your specification**

### Mobile Adjustable Height Gantry

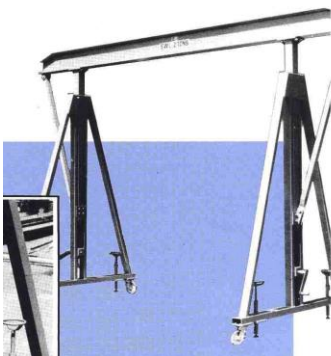

- Capacities up to 6000 kg
- Infinitely variable adjustment of up to two thirds of the basic height obtained by screw and bevel gearing, which is self sustaining
- Options include polyurethane tyred castors and parking jacks
- Standard height under beam 2743 - 4115 mm
- Standard width between 'A' frames 3353 mm

- **Also manufactured to your specification**